


PHILIPS

Switch module

Connected by
WiZ Pro



Datasheet

WiZ Pro Switch Module 220-240V

929003484281

Enabling connected lighting system for welcoming spaces

WiZ Pro Switch Module 220V-240V is an AC operated switch module which can work with self-reset switch panel. It can provide features as accessory in the system such as light on/off, dim up/down, night light mode and 4 favorite scenes by connecting different pins. It enables simple, cost effective wireless lighting system for energy saving and comfort. Advanced design of the switch module helps to build a reliable, scalable and standardized connected lighting with different functionalities from simple wireless dimming to cloud based operations.

Benefits

- Easy wireless dimming for energy saving and convenience
- Easy integration with self-reset switch panel to provide control functions
- Local communication protocol not relying on Wi-Fi network and connectivity, so the accessory can control the lights even if Wi-Fi is down. No gateway needed
- Some features can be modified remotely using cloud settings for the lights for favorites of rooms and scenes
- CE certificated

Features

- 220V to 240V AC input
- 9 dry contact pins
- 0.04W standby power
- 50,000 hours lifetime
- Integrated to be used as an accessory in WiZ Pro software suite:
<https://www.wizconnected.com/en/pro/get-started/>

Application

- Residential
- Hospitality
- Restaurant
- Retail
- School
- Leisure places

Logistical data

| Specification item | value |
|--------------------|--------------------------------|
| Product name | WiZ Pro Switch Module 220-240V |
| 12NC | 929003484281 |
| Pieces per box | 180 pcs |

Product Data

All specifications are typical and at 25 °C Tcase unless otherwise specified.

Electrical data

| Specification item | Value | Unit | Conditions |
|---------------------------------|----------------------|------|--|
| Rated input voltage | 220...240 | Vac | Performance range |
| Rated input current | 10 | mA | @ rated input voltage, pulse value, press button |
| Rated input frequency range | 50...60 | Hz | |
| Standby power | 0.04 | W | @ rated input voltage |
| Input voltage AC range | 198...264 | Vac | Functional range |
| ESD | 4KV @ HBM, 8KV @ air | | |
| Mains surge capability (L to N) | 1000 | V | Diff mode |
| Insulation | No | | Mains input to output terminal |

Interface

| Specification item | Value | Unit | Conditions |
|-----------------------|------------------|------|------------|
| Button type mechanism | Momentary action | | |
| Dry contact pins | 9 | pin | |
| Current capability | 1 | mA | |

Notes:

- 1) Switch panel press interval should >200ms

RF interface

| Specification item | Value | Unit | Conditions |
|--------------------------|-------------|------|----------------------|
| Communication method | Wi-Fi | | |
| Wi-Fi Frequency | 2400-2483.5 | MHz | IEEE Std 802.11 b/g, |
| Wi-Fi Transmission power | 20 | dbm | Maximum |
| Wi-Fi channel | 1...13 | | |

Indicator

| Specification item | Value | Unit | Conditions |
|--------------------|--|------|------------|
| LED indicator | Blue Color, indicating the pairing status and other procedures | | |

Operational temperature and humidity

| Specification item | Value | Unit | Conditions |
|---------------------|-----------|------|------------|
| Ambient temperature | -20...+45 | °C | |
| Relative humidity | 10...90 | % | |

Storage temperature and humidity

| Specification item | Value | Unit | Conditions |
|---------------------|-----------|------|------------|
| Ambient temperature | -25...+85 | °C | |
| Relative humidity | 5...95 | % | |

Lifetime

| Specification item | Value | Unit | Conditions |
|--------------------|--------|-------|----------------------|
| Lifetime | 50,000 | Hours | Maximum failures=10% |

Certificates and standards


| Specification item | Value |
|--------------------|----------------------|
| Approval marks | CB / CE, RED |
| Environment | RoHS , REACH |
| Connection | Wi-Fi IEEE802.11 b/g |
| Audible noise | < 20 dBA @30cm |
| Ingress Protection | IP20 |

Notes:


Hereby, [Signify] declares that the radio equipment type [WiZ bridge boxes] is in compliance with Directive 2014/53/EU (RED). The full text of the EU declaration of conformity is available at the following internet address: wizconnected.com.

Wiring & Connections

| Specification item | Value | Unit | Conditions |
|--|-----------|-----------------|-----------------------------------|
| Input Connector for Mains (A1, A2) | 0.5...2.5 | mm ² | Tolerance: +/- 0.1mm ² |
| Wire Strip Length (A1, A2) | 6..7 | mm | |
| Output Connector for Switch panel (B1...B9, D) | 0.5...1.0 | mm ² | Tolerance: +/- 0.1mm ² |
| Wire Strip Length (B1...B9, D) | 4..5 | mm | |

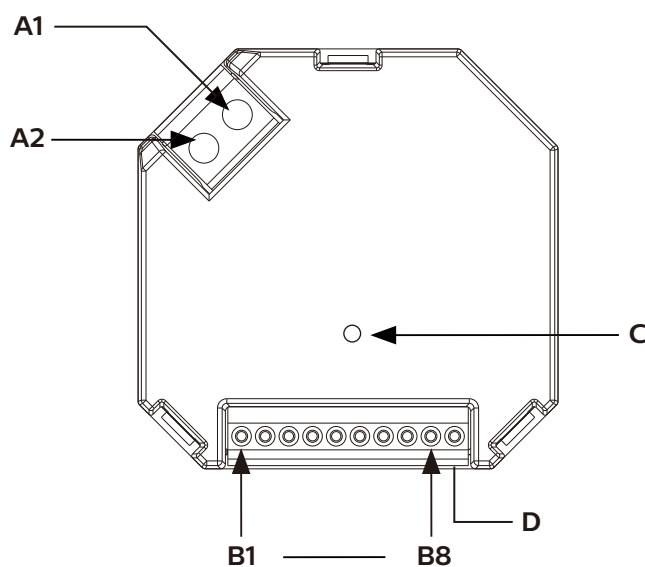

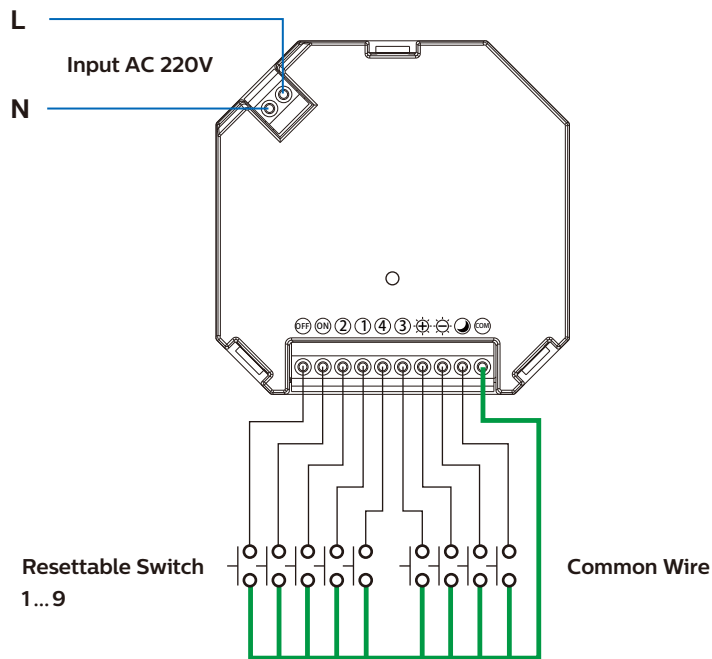


Example of connection:



1. Connect B1..B9 terminal to corresponding resettable switch panel terminals.
2. Connect another terminal of the resettable switch panel to COM terminal of switch module.
3. Plug mains cables into the switch module mains terminals.


Notes: resettable switch panel should be AC version (support mains input).

Wire definition:

| | Specification item | Definition | Remark |
|----|---|------------------------|--------|
| A1 | Mains: L | Live input terminal | |
| A2 | Mains: N | Neutral input terminal | |
| B1 | OFF | Turn off light | |
| B2 | ON | Turn on light | |
| B3 | 2 | Favorite mode 2 | Fav. 2 |
| B4 | 1 | Favorite mode 1 | Fav. 1 |
| B5 | 4 | Favorite mode 4 | Fav. 4 |
| B6 | 3 | Favorite mode 3 | Fav. 3 |
| B7 |  | Dim up | |
| B8 |  | Dim down | |
| B9 |  | Night mode | |
| D | COM | Common terminal | |
| C | LED | Led indicator | |

Dimensions and weight

| Specification item | Value | Unit | Conditions |
|----------------------|----------------|------|----------------------|
| Dimensions L x W x H | 45 x 45 x 18.3 | mm | Tolerance: +/- 0.1mm |
| Color | White | | |
| Weight | 30 | gram | |

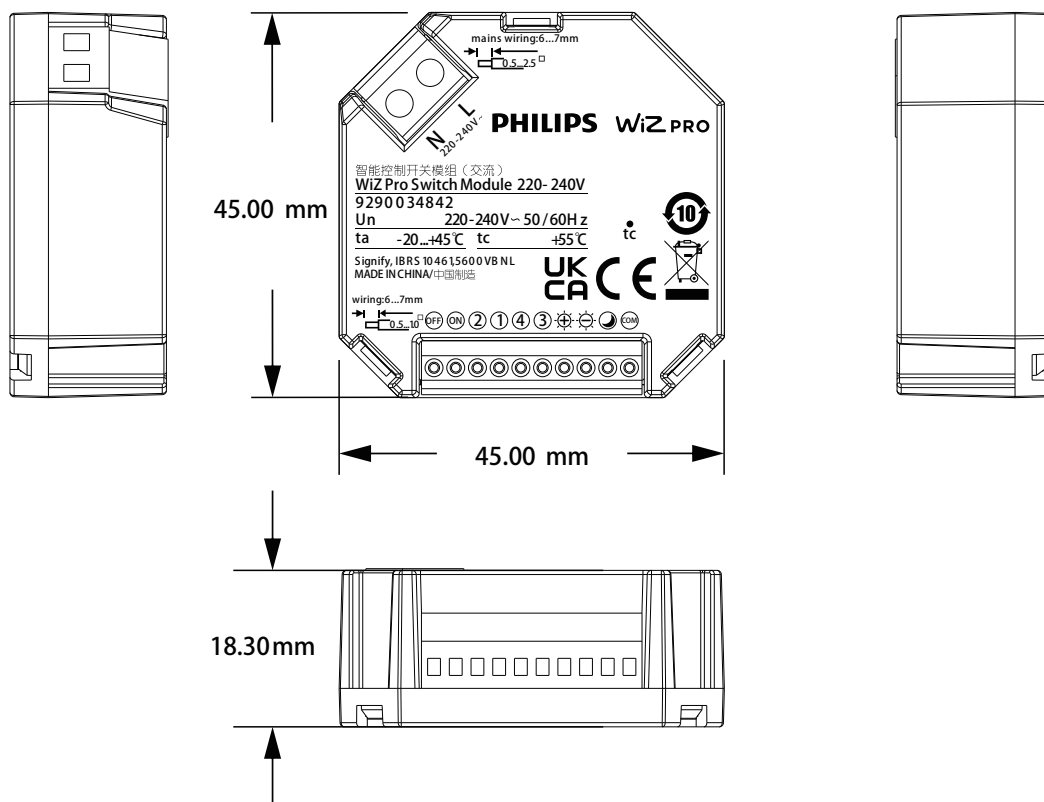

Download free Wiz APP



- Wi-Fi®, the Wi-Fi logo, the Wi-Fi CERTIFIED logo are registered trademarks of Wi-Fi Alliance.
- Wi-Fi CERTIFIED™, WPA2™ are trademarks of Wi-Fi Alliance.
- The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc.
- Amazon, Alexa and all related logos are trademarks of Amazon.com, Inc. or its affiliates. Google, Google Play and the Google Play logo are the trademark of Google LLC. The Apple logo and Siri are the registered trademark of Apple Inc.
- Any use of such marks by Signify is under license. Other trademarks and trade names are those of their respective owners.



© 2021 Signify Holding, IBRS 10461, 5600VB, NL. All rights reserved.

<https://www.wizconnected.com/en/pro/get-started/>

The information provided herein is subject to change, without notice. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify.

Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V. All other trademarks are owned by Signify Holding or their respective owners.

12/2021

Data subject to change