



TUV T5

TUV 64T5 HO 4P SE UNP

TUV T5 lamps are single- or double-ended UVC (germicidal) lamps used in professional water and air disinfection units. The small 16 mm diameter of the lamp allows for a small system design and design flexibility. TUV T5 lamps offer constant UV output over their complete lifetime, for maximum security of disinfection and high system efficacy.

Product data

• General Characteristics

| | |
|----------------------|---------------------|
| System Description | High Output |
| Cap-Base | 4 Pins Single Ended |
| Cap-Base Information | 4 Pins Single Ended |
| Bulb | T16 |
| Main Application | Disinfection |
| Useful Life | 9000 hr |

• Light Technical Characteristics

| | |
|--------------------------|---|
| Color Code | - |
| Color Designation (text) | - |

• Electrical Characteristics

| | |
|------------------------|-------|
| Lamp Wattage | 75 W |
| Lamp Wattage Technical | 145 W |
| Lamp Voltage | 175 V |
| Lamp Current | 0.8 A |

• UV-related Characteristics

| | |
|----------------|------|
| UV-C Radiation | 48 W |
|----------------|------|

• Product Dimensions

| | |
|--------------------|-----------------|
| Reference Length A | 1555.2 (max) mm |
| Overall Length C | 1564.5 (max) mm |
| Diameter D | 19.3 (max) mm |


• Product Data

| | |
|-----------------------------|-----------------------|
| Order code | 927971104099 |
| Full product code | 927971104099 |
| Full product name | TUV 64T5 HO 4P SE UNP |
| Order product name | TUV 64T5 HO 4P SE UNP |
| Pieces per pack | 1 |
| Packing configuration | 32 |
| Packs per outerbox | 32 |
| Bar code on pack - EAN1 | 8711500261311 |
| Bar code on outerbox - EAN3 | 8711500261328 |
| Logistic code(s) - 12NC | 927971104099 |
| Net weight per piece | 156.000 gr |

Dimensional drawing

PHILIPS

Dimensional drawing

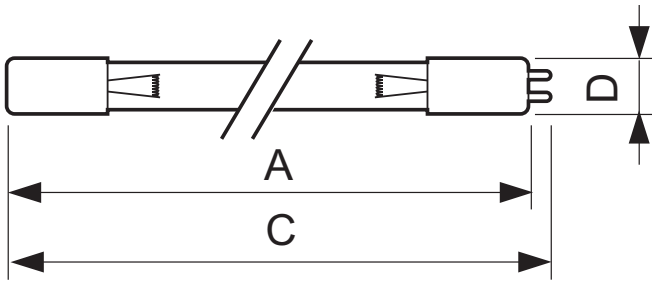


TUV 64T5 HO 4P SE UNP

| Product | A (Min) | A (Norm) | A (Max) | B (Min) | B (Norm) | B (Max) | C (Min) | C (Norm) | C (Max) | D (Max) | O (Norm) |
|-------------------|---------|----------|---------|---------|----------|---------|---------|----------|---------|---------|----------|
| TUV 64T5 HO 4P SE | - | - | 1555.2 | - | - | - | - | - | 1564.5 | 19.3 | - |



4 Pins Single Ended

Photometric data

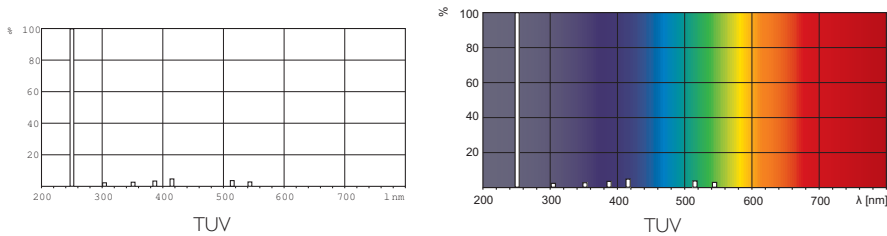

© 2013 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2013, June 21
data subject to change