



MSR Hot Restrike

MSR 400 HR 1CT

Thanks to an optimized color temperature and a high color rendering index, the MSR Hot Restrike creates perfect 'daylight' in any condition. Also, the single ended lamp design enables hot re-ignition, which ensures daylight lighting and superb color rendition is always instantly available. They also incorporate the innovative P3 technology, developed by Philips, which allows use at higher temperatures and therefore extends lifetime and consistency of high-quality light output.

Product data

• General Characteristics

System Description	Hot Restrike
Cap-Base	GZZ9.5
Cap-Base Information	-
Execution	-
Operating Position	any
Main Application	Studio/Theatre
Life to 50% failures	1000 hr
EM	

• Light Technical Characteristics

Color Code	-
Color Rendering Index	92 Ra8
Color Temperature	6000 K
Color Temperature Technical	5830 K
Chromaticity Coordinate X	323 -
Chromaticity Coordinate Y	328 -
Luminous Flux Lamp EM	28500 (min), 32000 (nom) Lm
Luminous Efficacy Lamp EM	80 Lm/W

• Electrical Characteristics

Lamp Wattage	400 W
Lamp Wattage Technical	400 W
Lamp Current	6.9 A
Ignition Supply Voltage	207 (min) V

Dimmable Yes

• Luminaire Design Requirements

Pinch Temperature	350 (max) C
Bulb Temperature	700 (max) C

• Product Dimensions


Overall Length C	110 (max) mm
Diameter D	23 (max) mm
Width F	23 (min), 23.5 (nom), 24 (max) mm
Light Center Length L	59 (min), 60 (nom), 61 (max) mm
Arc Length O	6.0 mm

• Product Data

Order code	928050205115
Full product code	928050205115
Full product name	MSR 400 HR 1CT
Order product name	MSR 400 HR 1CT/4
Pieces per pack	1
Packing configuration	4
Packs per outerbox	4
Bar code on pack - EAN1	8718291227960
Bar code on outerbox - EAN3	8718291227977
Logistic code(s) - 12NC	928050205115
Net weight per piece	0.034 kg


PHILIPS

Dimensional drawing

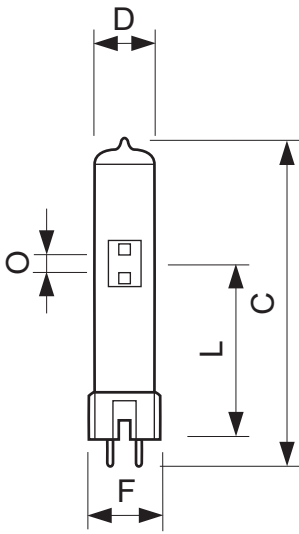


MSR 400 HR 1CT

Product	A (Min)	A (Norm)	A (Max)	C (Max)	D (Max)	D1 (Norm)	F (Min)	F (Norm)	F (Max)	L (Min)	L (Norm)	L (Max)	O (Norm)
MSR 400 HR	-	-	-	110	23	-	23	23.5	24	59	60	61	6.0




GZZ9.5

Photometric data

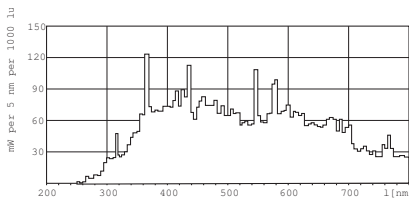

MSR 125, 200, 250, 400, 575, 1200 (C), 2500, 4000, 6000, 12000, 18000 HR

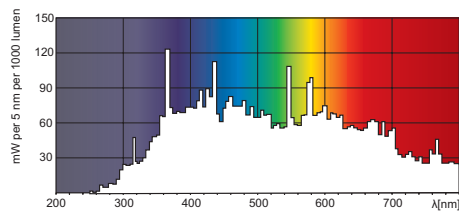

MSR Hot Restrike



© 2014 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2014, June 21
data subject to change