

HF-Performer II for TL-D lamps

HF-P 170 TL-D EII 220-240V 50/60Hz

Slim, lightweight High Frequency electronic ballast for TL-D fluorescent lamps, based on EII technology



Product data

• General Characteristics

Application code	EII
Rated Lamptype	TL-D
Rated Number of Lamps	1 piece
Rated Ballast-Lamp Power	70
Line Voltage	220-240 V
Line Frequency	50/60 Hz
Housing	L 280x30x28
Energy Efficiency Index	A2
Lifetime 90% surv.@Tcaselife	50000 hr
Ignition Method	Warm Start

• Operating Characteristics

Automatic restart	Yes
Ignition time	0.55 (max) s
Operating frequency	42 (min), 45 (nom) kHz
Mains voltage safety (AC)	-10%/+10%
Mains voltage performance (AC)	-8%/+6%
Inrush current Peak	18 (max) A
Inrush current Width	0.25 ms
Earth leakage current	0.5 mA
Power losses gear	7.8 W
Constant wattage deviation	-2%/+2%
Ballast Lumen Factor	0.95 -
PowerFactor 100% output power	0.99 -
Battery voltage lamp ignition	198-254 V

Battery voltage running lamps	176-254
Overvoltage protection 320Vac	48 hr
Overvoltage protection 350Vac	2 hr
Max ballast on MCB(16A type B)	28 x
Crestfactor	1.7 (max) -
Hum and Noise level	Inaudible

• Wiring Characteristics

Cable-Cap output-wires to earth	200 pF
Cable-Cap output-wires mutual	200 pF
Conn.type input terminals	WAGO 251 universal connector [Suitable for both automatic wiring (ALF and ADS) and manual wiring]
Conn.type output terminals	WAGO 251 universal connector [Suitable for both automatic wiring (ALF and ADS) and manual wiring]
Striplength	8.0-9.0 mm
Dual fixture Master/Slave	Possible, lamp wires 3m max. length [Master/Slave operation possible]
Wcs Input terminals	0.50-1.00 mm ²
Wcs Output terminals	0.50-1.00 mm ²
Wcs auto insertion (ALF/ADS)	0.50 mm ²

• System Chars on driver level

Rated Lamp Power on TL-D	70
--------------------------	----



asimpleswitch.com

PHILIPS

HF-Performer II for TL-D lamps

System Power on TL-D	67.8
Lamp Power on TL-D	60
Power Loss on TL-D	7.8

• Temperature Characteristics

T-case life	75 C
T-case maximum	75 (max) C
T-ignition	-25 (min), 50 (max) C
T-ambient	-25 (min), 50 (max) C
T-storage	-40 (min), 80 (max) C

• Product Dimensions

Length A1	280.0 mm
Fixing Hole Distance	265.0 mm
Length A2	
Width B1	30.0 mm
Height C1	28.0 mm
Fixing Hole Diameter D1	4.2 mm

• Approval & Application Chars


EMI 9kHz .. 30 MHz	EN 55015
EMI 30 MHz .. 1000MHz	EN 55022 level B [Level = Class]
Safety Standard	IEC 61347-2-3
Performance Standard	IEC 60929

Quality Standard	ISO 9000:2000
Environmental Standard	ISO 14001
Harmonic current emissions	IEC 61000-3-2
EMC Immunity	IEC 61547
Vibrations	IEC 68-2-6 Fc
Bumps	IEC 68-2-29 Eb
Humidity	EN 61347-2-3 clause 11
Approval marks	ENEC / VDE-EMV
CE marking	Yes
Temperature marking	110 [Yes]
Emergency standard	IEC 60598-2-22

• Product Data

Order code	913700191366
Full product code	913700191366
Full product name	HF-P 170 TL-D EII 220-240V 50/60Hz
Order product name	HF-P 170 TL-D EII 220-240V 50/60Hz
Pieces per pack	1
Packing configuration	12
Packs per outerbox	12
Bar code on pack - EAN1	8711500934116
Bar code on outerbox - EAN3	8711500934123
Logistic code(s) - 12NC	913700191366
Net weight per piece	0.210 kg

Dimensional drawing

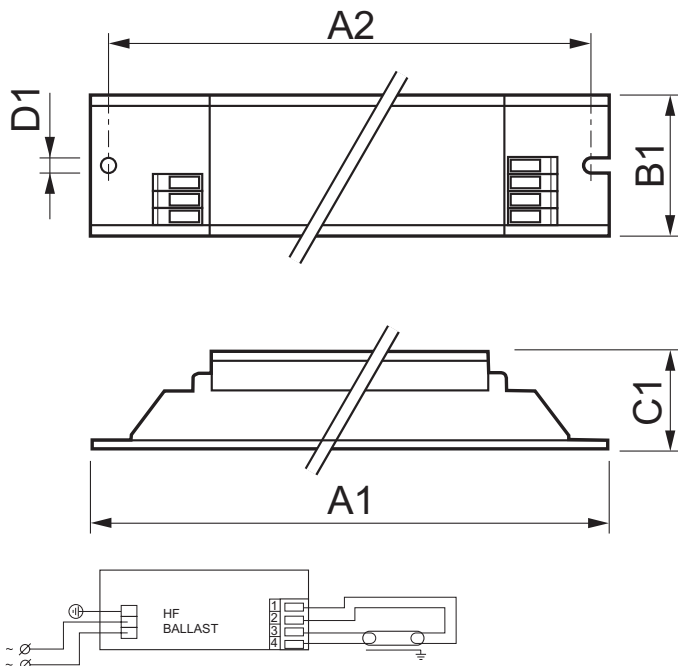

HF-P 170 TL-D EII 220-240V 50/60Hz

Product	A1 (Norm)	A2 (Norm)	B1 (Norm)	C1 (Norm)	D1 (Norm)
HF-P 170 TL-D EII 220-240V 50/60Hz	280.0	265.0	30.0	28.0	4.2



© 2014 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2014, April 11
data subject to change